

Signaling units Ø 60

Harmony[®] XVGU monolithic tower lights

Catalog

September 2013



General contents

Harmony® XVGU monolithic tower lights


Selection guide	<i>page 2</i>
■ Presentation	
□ Multi-color USB tower lights, Ø 60 mm	<i>page 6</i>
■ Description	<i>page 8</i>
■ References	
□ Pre-assembled tower lights	<i>page 8</i>
□ Accessories	<i>page 8</i>
□ Associations	<i>page 9</i>
■ How to find the “Automation and Control” products	
□ Search, visualize, and download	<i>page 10</i>
□ Access product references with adapted tools	<i>page 12</i>
□ Compare, select, and compile	<i>page 14</i>
□ Check the product status, design your equipment	<i>page 15</i>
■ Product reference index	<i>page 16</i>

Signaling Units

Monolithic tower lights

Harmony® type XVGU Ø 60

Multi-color USB tower lights

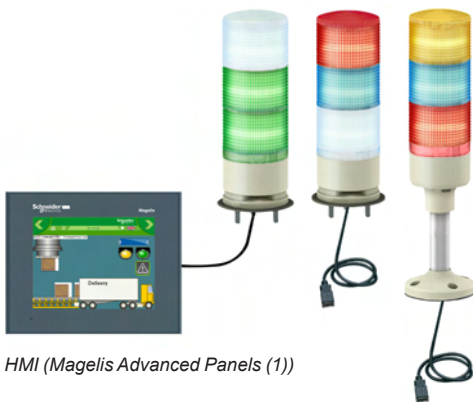

HMI (Magelis Advanced Panels (1))

Presentation

The monolithic USB tower lights of the Harmony® XVGU range are designed to support HMI (Magelis™ Advanced Panels (1)). These new tower lights with multi-color LEDs are unique and simple-to-use as the states and patterns are directly set and modified in the HMI application.

The XVGU tower lights provide long distance indication of the operating status or sequences of a machine or installation, both visually by means of illuminated signaling units with 360° visibility, and audibly by means of a buzzer.

- The tower light comes with a pre-assembled USB cable for simple wiring and easy integration with the Magelis Advanced Panels (1) (2).
- The tower light settings are selected from the Set screen of the HMI application at the time of integration.
 - The multi-color LEDs on the three levels can be set to numerous color combinations (red, orange, green or blue) for sophisticated signaling.
 - The 2-tone buzzer volume and alarm type (4 pre-recorded types) can be set easily.
- The tower lights allow to optimize your equipment: many customized configurations can be made from a sole product.
- The range involves Ø 60 mm/2.36 in. products and is therefore ideal for use in many activity sectors (textiles, packaging, baggage handling). It is also ideal for use with metal tools, plastic extrusion machines and assembly lines. This range is only for indoor applications.

XVGU tower lights are supplied:

- with 3 multi-color LEDs and a clear lens,
- with a 2-tone buzzer,
- with pre-assembled USB cable for easy connection (2),
- with USB cable clamp for firm connection,
- fitted with one of the following mounting options:
 - direct base mounting (IP 42),
 - aluminium tube mounting and fixing plate (IP 42).

(1) Please refer to "USB tower lights compatible with Magelis Advanced Panels" table on page 9.

(2) For extension, use either the Schneider Electric USB cable (BMXXCAUSBH018) or a third-party USB Type A/mini B cable of maximum length 4 m/13.12 ft.

Signaling Units


Monolithic tower lights

Harmony® type XVGU Ø 60

Multi-color USB tower lights

Presentation (continued)

The following illustrates the integration of XVGU tower lights with the Magelis™ Advanced Panels (1).

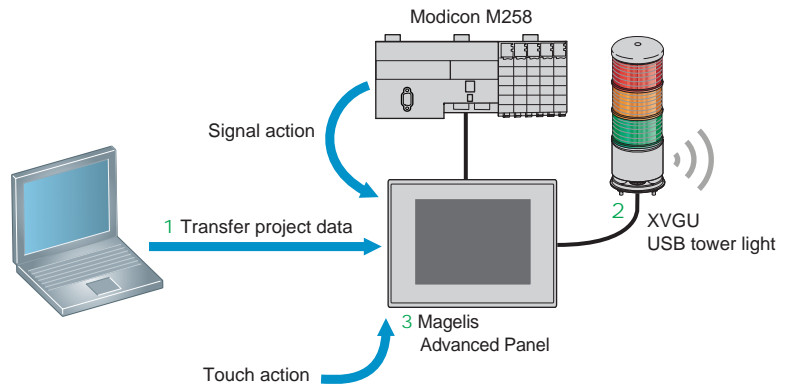

- 1** The HMI application is created on a computer using the Vijeo designer HMI editor software (V6.1 Service pack 1 or higher). It is then downloaded to the Magelis Advanced Panel (1) via a USB cable for setting situation, color, and buzzer actions.
- 2** The tower light's pre-assembled USB cable is connected to the Magelis terminal for power supply and signal transmission (2).
- 3** The LED colors, flashing patterns, and buzzer tones are set and modified in the HMI Set screen.

Illuminated signaling

The light source consists of three multi-color LEDs (red, orange, green or blue) completed with a clear lens to provide an aesthetic look and reliable signaling (clear lenses help to avoid color reflectance in bright environments). When LEDs are not powered, the tower lights appear translucent. The LED colors can be set to many possible combinations of Red, Orange, Green, and Blue.

Audible signaling

The tower light is supplied with a 2-tone buzzer audible signaling unit, the volume of which can be adjusted up to 85 dB. This audible unit with 4 pre-recorded alarm types is located in the base of the tower light.

Environment

The XVGU tower lights are CE certified and conform to EN 61000-6-2 and EN 61000-6-4 standards.

Cabling

XVGU tower lights have pre-assembled USB cable with "Type A female" connector to attach to any standard USB mini B cable. A clamp is provided to prevent unintended removal or disconnection of the tower light from the Magelis Advanced Panel.


(1) Please refer to "USB tower lights compatible with Magelis Advanced Panels" table on page 9.
 (2) For extension, use either the Schneider Electric USB cable (BMXXCAUSBH018) or a third-party USB Type A/mini B cable of maximum length 4 m/13.12 ft.

Signaling Units

Monolithic tower lights

Harmony® type XVGU Ø 60

Multi-color USB tower lights

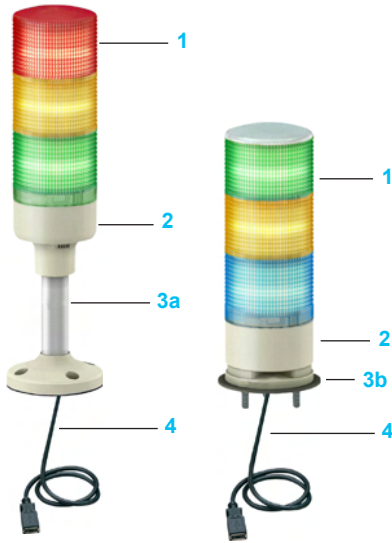

Description

XVGU monolithic tower lights comprise an assembly of:

- 1 Three layers of multi-color illuminated signaling units (red, orange, green, or blue) which are set in the HMI application. Each XVGU tower light is equipped with multi-color LEDs and a clear lens molded from a single piece of clear plastic. The colors are visible only when the LEDs are supplied with power (5 V DC).
- 2 A base unit integrating the buzzer.
- 3 A fixing base for mounting on a horizontal support:
 - 3a a fixing base, comprising a 100 mm/3.94 in. aluminium support tube mounted on a fixing plate,
 - 3b a fixing base fitted with 3 screws for direct mounting.
- 4 A USB cable with "Type A female" connector, the projecting length being 300 mm/11.81 in. for tube mounting and 400 mm/15.75 in. for direct mounting models (1).

Pre-assembled tower lights 5 V, Ø 60 mm/2.36 in.

Description	Light source (included)	Degree of protection	Signaling colors	Reference	Weight kg/lb
-------------	-------------------------	----------------------	------------------	-----------	--------------

With 100 mm/3.94 in. aluminium tube mounting and fixing plate

Tower light with buzzer	Multi-color LED for various states and patterns	IP 42	Red/Orange/Green/Blue	XVGU3SHAV	0.300/0.661
--------------------------------	---	-------	-----------------------	------------------	-------------

With direct base mounting

Tower light with buzzer	Multi-color LED for various states and patterns	IP 42	Red/Orange/Green/Blue	XVGU3SWV	0.300/0.661
--------------------------------	---	-------	-----------------------	-----------------	-------------

Accessories

Description	Utilization	Length m/ft	Reference	Weight kg/lb
Connection cable from PC to the terminal (USB Type A/mini B)	Cable for transferring screen data from a PC (USB Type A) to a HMI (USB Type mini B)	1.8/5.91	BMXXCAUSBH018	0.065/ 0.143

Note: Signaling colors correspond to a combination of 4 colors (Red, Orange, Green, and Blue) which can be set easily in the HMI application.

(1) For extension, use either the Schneider Electric USB cable (BMXXCAUSBH018) or a third-party USB Type A/mini B cable of maximum length 4 m/13.12 ft.

Signaling Units

Monolithic tower lights

Harmony® type XVGU Ø 60

Multi-color USB tower lights

USB tower lights compatible with Magelis™ Advanced Panels and HMI Controllers

Type of tower light 1	Type of Advanced Panels or HMI Controllers	Description	Reference 2 (1)		
XVGU3SWV XVGU3SHAV	Monochrome touch screen Standard Advanced Panels	Multifunction, 5.7" QVGA screen/Black and White/STN	XBTGT2120		
		Multifunction, 5.7" QVGA screen/Blue mode/STN	XBTGT2130		
	Color touch screen Standard Advanced Panels	Multifunction, 5.7" QVGA screen/STN	XBTGT2220		
		Multifunction, 5.7" QVGA screen/TFT	XBTGT2330		
		Multifunction, 5.7" VGA screen/TFT	XBTGT2430		
		Multifunction, 5.7" QVGA screen/High brightness TFT	XBTGT2930		
		Multifunction, 7.5" VGA screen/STN	XBTGT4230		
		Multifunction, 7.5" VGA screen/TFT	XBTGT4330		
		Multifunction, 7.5" VGA screen/TFT	XBTGT4340		
		Multifunction, 10.4" VGA screen/TFT	XBTGT5330		
		Multifunction, 10.4" VGA screen/TFT	XBTGT5340		
		Multifunction, 10.4" SVGA screen/TFT	XBTGT5430		
		Multifunction, 12.1" SVGA screen/TFT	XBTGT6330		
		Multifunction, 12.1" SVGA screen/TFT	XBTGT6340		
		Multifunction, 15" XGA screen/TFT	XBTGT7340		
		Keypad/touch screen Standard Advanced Panels		Multifunction, 5.7" screen/Black and white/STN	XBTGK2120
				Multifunction, 5.7" screen/Color/TFT	XBTGK2330
Multifunction, 10.4" screen/Color/TFT	XBTGK5330				
Junction box		Junction Box for XBTGH2 (without Fieldbus)	XBTZGJBOX		
Optimum Advanced Panels		3.5" QVGA screen/TFT	HMIGTO1300		
		3.5" QVGA screen/TFT	HMIGTO1310		
		5.7" QVGA screen/TFT	HMIGTO2300		
		5.7" QVGA screen/TFT	HMIGTO2310		
		5.7" QVGA screen/Stainless steel	HMIGTO2315		
		7.0" WVGA screen/TFT	HMIGTO3510		
		7.5" VGA screen/TFT	HMIGTO4310		
		10.4" VGA screen/TFT	HMIGTO5310		
		10.4" VGA screen/Stainless steel	HMIGTO5315		
		12.1" SVGA screen/TFT	HMIGTO6310		
HMI Controllers		3.5" screen QVGA color/TFT	HMISCU6A5		
		3.5" screen QVGA color/TFT	HMISCU6B5		
		5.7" screen QVGA color/TFT	HMISCU8A5		
		5.7" screen QVGA color/TFT	HMISCU8B5		
		5.7" screen/Color/STN	XBTGC2230U		
		5.7" screen/Color/STN	XBTGC2230T		



Note: For more information on Magelis Advanced Panels and HMI Controllers, please refer to our website www.schneider-electric.com.

(1) The minimum required Vijeo designer software version is Vjd 6.1 Service pack 1.

Schneider Electric Industries SAS

Head Office
35, rue Joseph Monier
F-92500 Rueil-Malmaison
France

www.schneider-electric.com

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Design: Schneider Electric
Photos: Schneider Electric
Printed by:

DIA5ED2130808EN

September 2013