


# Control and signaling units Ø 22

Harmony<sup>®</sup> XB4 metal,  
Explosive atmosphere offer

Catalog

February 2018

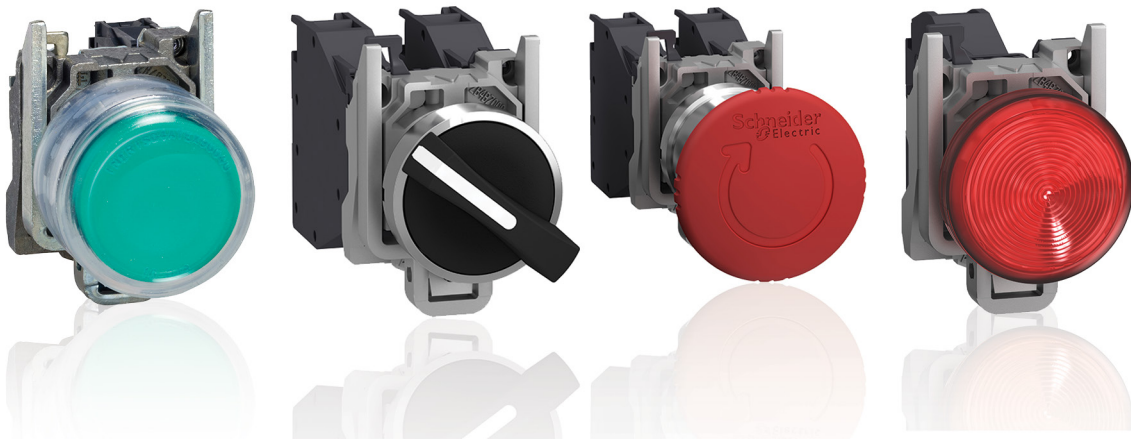

# Quick access to Product information

## Select your Catalogue, your Training

### Digi-Cat

The complete digital catalogue for industrial automation




Makes your choice easy every day, everywhere!



With just 3 clicks, you can reach the 7,000 pages of the Industrial Automation & Control catalogue, in both English and French.

- Digi-Cat is available on a USB key (for PC). To get your Digi-Cat, please contact your local center
- Download Digi-Cat from this address:

<http://digi-cat.schneider-electric.com/download.html>


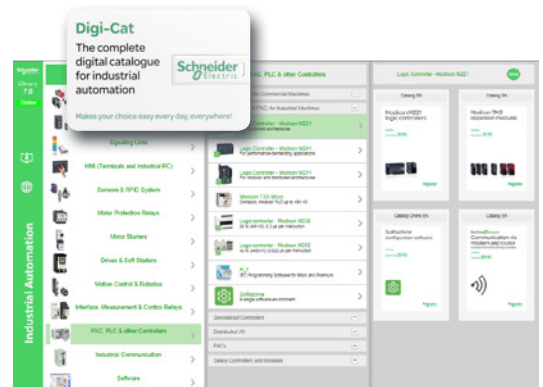


### Find your training

- Find the right training for your needs
- Locate the training center with the selector tool, using this address:

<http://www.schneider-electric.com/b2b/en/services/training/technical-training.jsp>

then click on

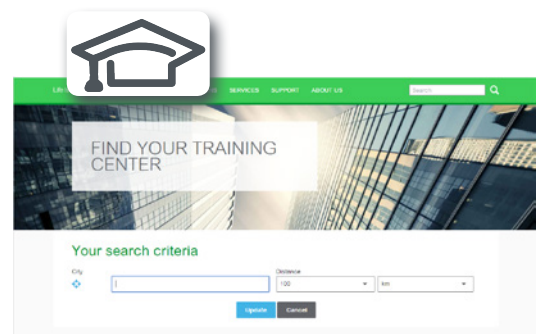

Life Is On



# General contents

## Harmony® XB4 metal for explosive atmospheres

■ **Presentation** ..... page 2

### ■ **References**

#### **For ATEX dust offer**

- Spring return pushbuttons, unmarked
  - Illuminated and non illuminated ..... page 4
- Mushroom head pushbuttons, spring return ..... page 5
- Emergency stop and Emergency switching off functions ..... page 5
- Selector switches with standard and long handle..... page 6
- Key switches..... page 6
- Pilot lights with integral LED..... page 7

#### **For Explosive atmosphere dust + gas offer**

- Spring return pushbuttons, unmarked
    - Illuminated and non illuminated ..... page 8
  - Mushroom head pushbuttons, spring return ..... page 9
  - Emergency stop and Emergency switching off functions ..... page 9
  - Selector switches with standard and long handle..... page 10
  - Key switches..... page 10
  - Pilot lights with integral LED..... page 11
  - Push-to-test pilot light ..... page 11
  - Contact and Light blocks..... page 11
- **Product reference index**..... page 12

# Control and signaling units Ø 22

## Harmony XB4 metal for explosive atmospheres

### Pushbuttons, switches, and pilot lights

#### Presentation

The Harmony® XB4 Explosive atmosphere range of modular control and signaling units are designed for industries where explosive atmospheres can be present. This range is ideal for use in environments where the generation of possible ignition sources can be prevented and controlled.

This range includes 2 offers that meet the different standards:

- ATEX dust offer: compliant with European Directive 2014/34/EU , Zone 21/22
- Explosive atmosphere dust + gas offer: IECEx Zone 1/2/21/22; UL 60079 Zone 1/ 2/21/22; NEC 500 Class 1 Div 2, Class 2 Div 2 & Class 3

This range offers products for the following functions

- ATEX dust offer: illuminated and non-illuminated pushbuttons, selector and key switches, Emergency stop functions, and pilot lights.
- Explosive atmosphere dust + gas offer: illuminated and non-illuminated pushbuttons, selector and key switches, Emergency stop functions, pilot lights, push-to-test pilot lights, contact and LED light blocks.

#### Explosive atmosphere and ignition sources

According to the directives, a potentially explosive atmosphere is the mixture of air with flammable substances in the form of gas, vapor, and/or dust, that when exposed to an ignition source under normal atmospheric conditions can completely or partially catch fire and explode.

The types of ignition sources that can create an explosive atmosphere are:

- Hot surfaces
- Flames and hot gases
- Mechanically produced sparks
- Electrical equipment
- Transient currents
- Static electricity
- Lightning strikes
- Electromagnetic waves
- Optical radiation
- Ultrasound
- Chemical reactions
- People (indirectly)


Explosive atmospheres are found in areas like:

- Metal surface grinding, especially aluminum dust and particles
- Oil refineries, rigs and processing plants
- Gas pipelines and distribution centers
- Printing industries, paper and textiles
- Aircraft refueling and hangars
- Chemical processing plants
- Grain handling and storage
- Sewage treatment plants
- Surface coating industries
- Underground coal mines
- Wood working areas
- Sugar refineries
- Vessels/ships
- Power plants


#### Explosive atmosphere IECEx zones and NEC 500 class and divisions

Explosive atmospheres are classified into the following categories and zones:

Category	Level of risk	IECEx/UL	NEC 500
Gas	High	<del>Zone 0</del>	<del>Class 1 div 1</del>
	Medium	Zone 1	
	Low	Zone 2	Class 1 div 2
Dust	High	<del>Zone 20</del>	<del>Class 2 div 1</del>
	Medium	Zone 21	
	Low	Zone 22	Class 2 div 2 Class 3 (fibers)

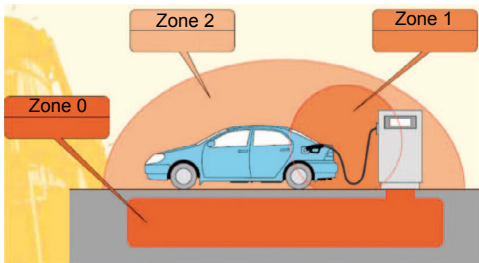

Example of hazardous gas and vapor zone

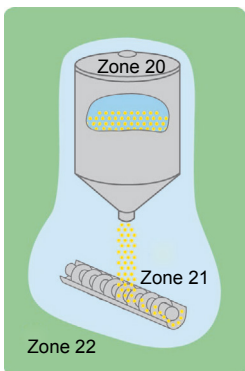

Example of hazardous dust zone

# Control and signaling units Ø 22

## Harmony XB4 metal for explosive atmospheres

### Pushbuttons, switches, and pilot lights


#### Presentation (continued)

##### Explosive atmosphere certification

Equipment made for use in potentially hazardous areas is obliged to follow a dedicated procedure for testing & inspection. Following the results of this procedure, the XB4 explosive atmosphere range obtained the following certificates:

- ATEX dust offer
  - ATEX certificate: 04ATEX9004U
- Explosive atmosphere dust + gas offer
  - ATEX certificate: 04ATEX9004U
  - IECEx certificate: IECEx INE 18.0003U
  - cULus Industrial control equipment for use in Hazardous Locations: E497361
  - cULus Emergency stop devices for use in Hazardous Locations: E497838

##### Marking example for XB4●●●GEX

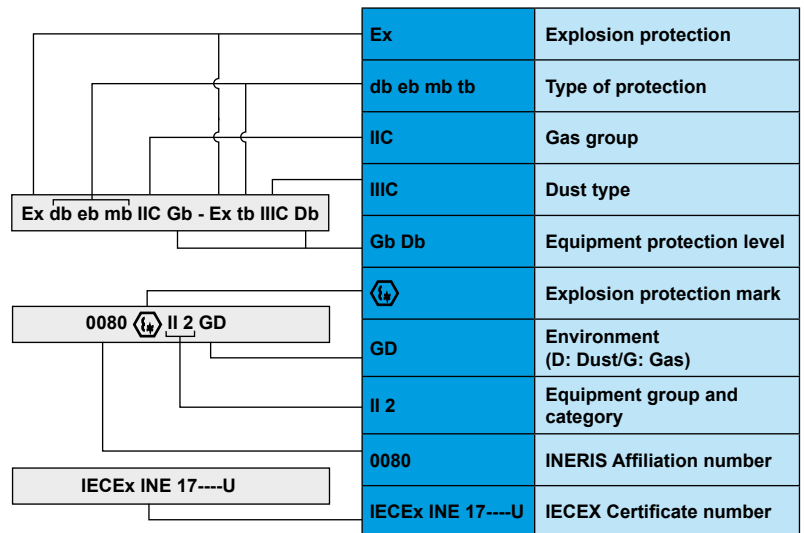

##### Applications

- Industrial applications
  - Food & Beverage
  - Oil & Gas, including petrochemical extraction & transformation, car gas stations and gas bottling plants
  - Chemicals
  - Printing
  - Paint manufacturing lines




Food & Beverage



Oil & Gas



Printing



Paint manufacturing

For more technical information, please refer to the Harmony XB4 Explosive atmosphere products page on the Schneider Electric website.


# Control and signaling units Ø 22

Harmony XB4 metal, explosive atmosphere


ATEX dust offer

Spring return pushbuttons, unmarked

## Pushbuttons with silicon booted head for severe environments (1) Screw clamp terminal connections (Schneider Electric anti-loosening system)

Shape of head	Type of push	Zone		Type of contact		Color of push	Reference	Weight kg/lb
		Dust	Gas	NO	NC			
 XB4BP482EX	Booted, clear silicon For insertion of legends (color of push unobscured)	21-22	-	1	-	White	XB4BP181EX	0.082/0.181
				1	-	Green	XB4BP381EX	0.082/0.181
				-	1	Red	XB4BP482EX	0.082/0.181
				1	-	Yellow	XB4BP581EX	0.082/0.181
				1	-	Blue	XB4BP681EX	0.082/0.181
	Booted, clear silicon (color of push unobscured)	21-22	-	1	-	Black	XB4BP21EX	0.082/0.181
				1	-	Green	XB4BP31EX	0.082/0.181
				-	1	Red	XB4BP42EX	0.082/0.181
				1	-	Yellow	XB4BP51EX	0.082/0.181
				1	-	Blue	XB4BP61EX	0.082/0.181
	Booted, colored silicon	21-22	-	1	-	White	XB4BPS11EX	0.082/0.181
				1	-	Black	XB4BPS21EX	0.082/0.181
				1	-	Green	XB4BPS31EX	0.082/0.181
				-	1	Red	XB4BPS42EX	0.082/0.181
				1	-	Yellow	XB4BPS51EX	0.082/0.181
1	-	Blue	XB4BPS61EX	0.082/0.181				

## Illuminated pushbuttons with silicon booted head for severe environments (1) Screw clamp terminal connections (Schneider Electric anti-loosening system)

Shape of head	Type of push	Zone		Type of contact		Supply voltage V	Color of push	Reference	Weight kg/lb
		Dust	Gas	NO	NC				
 XB4BP383B5EX	Booted, clear silicon (color of push unobscured)	21-22	-	1	-	24 ~ 50/60 Hz	White	XB4BP183B5EX	0.102/0.225
				1	-		Green	XB4BP383B5EX	0.102/0.225
				-	1		Red	XB4BP483B5EX	0.102/0.225
				1	-		Yellow	XB4BP583B5EX	0.102/0.225
				1	-		Blue	XB4BP683B5EX	0.102/0.225
				1	-		240 ~ 50/60 Hz	White	XB4BP183M5EX
				1	-	Green		XB4BP383M5EX	0.102/0.225
				-	1	Red		XB4BP483M5EX	0.102/0.225
				1	-	Yellow		XB4BP583M5EX	0.102/0.225
				1	-	Blue		XB4BP683M5EX	0.102/0.225
				1	-	24...120 ~ 50/60 Hz		White	XB4BP183BG5EX
				1	-		Green	XB4BP383BG5EX	0.102/0.225
	-	1	Red	XB4BP483BG5EX	0.102/0.225				
	1	-	Yellow	XB4BP583BG5EX	0.102/0.225				
	1	-	Blue	XB4BP683BG5EX	0.102/0.225				
	1	-	48...120 ~ 50/60 Hz	White	XB4BP183G5EX		0.102/0.225		
	1	-		Green	XB4BP383G5EX	0.102/0.225			
	-	1		Red	XB4BP483G5EX	0.102/0.225			
	1	-		Yellow	XB4BP583G5EX	0.102/0.225			
	1	-		Blue	XB4BP683G5EX	0.102/0.225			

(1) For additional contacts, please use standard Harmony XB4 range contact blocks ZBE101(1 NO) and ZBE102 (1 NC)

# Control and signaling units Ø 22

Harmony XB4 metal, explosive atmosphere


ATEX dust offer

Mushroom head pushbuttons, spring return

Emergency stop and Emergency switching off functions

## Mushroom head pushbuttons (1)

Screw clamp terminal connections (Schneider Electric anti-loosening system)




Shape of head	Type of reset	Zone		Type of contact		Push Ø (mm)/in.	Color	Reference	Weight kg/lb		
		Dust	Gas	NO	NC						
	Mushroom head	21-22	-	1	-	40/1.575	Black	<b>XB4BC21EX</b>	0.122/0.269		
				1	-		Green			<b>XB4BC31EX</b>	0.122/0.269
				-	1		Red			<b>XB4BC42EX</b>	0.122/0.269
				1	-		Yellow			<b>XB4BC51EX</b>	0.122/0.269
				1	-		Blue			<b>XB4BC61EX</b>	0.122/0.269



XB4BC21EX

## Emergency stop and switching off pushbuttons with trigger action and mechanical latching (1)

Screw clamp terminal connections (Schneider Electric anti-loosening system)

Shape of head	Type of reset	Zone		Type of contact		Push Ø (mm)/in.	Color	Reference	Weight kg/lb
		Dust	Gas	NO	NC				
	Push-pull	21-22	-	1	1	40/1.575	Red	<b>XB4BT845EX</b>	0.125/0.276
	Turn to release	21-22	-	1	1			<b>XB4BS8445EX</b>	0.118/0.260
	Key release (key no. 455)	21-22	-	1	1			<b>XB4BS9445EX</b>	0.133/0.293



XB4BS9445EX

(1) For additional contacts, please use standard Harmony XB4 range contact blocks ZBE101(1 NO) and ZBE102 (1 NC)


# Control and signaling units Ø 22

Harmony XB4 metal, explosive atmosphere

ATEX dust offer


Selector switches with standard and long handle

Key switches




XB4BD33EX

Selector switches with standard handle (1)										
Screw clamp terminal connections (Schneider Electric anti-loosening system)										
Shape of head	Type of operator	Zone		Type of contact		Positions		Reference	Weight kg/lb	
		Dust	Gas	NO	NC	Number	Type			
	Standard handle, Black	21-22	-	1	1	2-position 90°	Stay put		XB4BD25EX	0.102/0.225
				2	-	3-position ± 45°	Stay put		XB4BD33EX	0.102/0.225
				-	-	Spring return to center		XB4BD53EX	0.102/0.225	



XB4BJ33EX

Selector switches with long handle (1)										
Screw clamp terminal connections (Schneider Electric anti-loosening system)										
Shape of head	Type of operator	Zone		Type of contact		Positions		Reference	Weight kg/lb	
		Dust	Gas	NO	NC	Number	Type			
	Long handle, Black	21-22	-	1	-	2-position 90°	Stay put		XB4BJ21EX	0.096/0.212
				2	-	3-position ± 45°	Stay put		XB4BJ33EX	0.107/0.236
				-	-	Spring return to center		XB4BJ53EX	0.107/0.236	



XB4BG33EX

Key switches (1)											
Screw clamp terminal connections (Schneider Electric anti-loosening system)											
Shape of head	Type of operator	Zone		Type of contact		Positions		Reference	Weight kg/lb		
		Dust	Gas	NO	NC	Number	Type				
	Key switch with key no. 455	21-22	-	1	-	2-position 90°	Stay put		XB4BG21EX	0.153/0.337	
									XB4BG41EX	0.153/0.337	
						-	-	Spring return to left		XB4BG61EX	0.153/0.337
						2	-	3-position ± 45°	Stay put		XB4BG03EX
XB4BG33EX	0.164/0.362										

(1) For additional contacts, please use standard Harmony XB4 range contact blocks ZBE101(1 NO) and ZBE102 (1 NC)

## Control and signaling units Ø 22


Harmony XB4 metal, explosive atmosphere

ATEX dust offer

Pilot lights with integral LED

## Pilot lights with integral LED (with plain lens) (1)

Screw clamp terminal connections (Schneider Electric anti-loosening system)

Shape of head	Supply voltage V	Zone		Color	Reference	Weight kg/lb
		Dust	Gas			
 Protected LED	24 ~ (50/60 Hz)	21-22	–	White	<b>XB4BVB1EX</b>	0.080/0.176
				Green	<b>XB4BVB3EX</b>	0.080/0.176
				Red	<b>XB4BVB4EX</b>	0.080/0.176
				Orange	<b>XB4BVB5EX</b>	0.080/0.176
				Blue	<b>XB4BVB6EX</b>	0.080/0.176
	24...120 ~ (50/60 Hz)	21-22	–	White	<b>XB4BVBG1EX</b>	0.080/0.176
				Green	<b>XB4BVBG3EX</b>	0.080/0.176
				Red	<b>XB4BVBG4EX</b>	0.080/0.176
				Orange	<b>XB4BVBG5EX</b>	0.080/0.176
				Blue	<b>XB4BVBG6EX</b>	0.080/0.176
	110...120 ~ (50/60 Hz)	21-22	–	White	<b>XB4BVG1EX</b>	0.080/0.176
				Green	<b>XB4BVG3EX</b>	0.080/0.176
				Red	<b>XB4BVG4EX</b>	0.080/0.176
				Orange	<b>XB4BVG5EX</b>	0.080/0.176
				Blue	<b>XB4BVG6EX</b>	0.080/0.176
	230...240 ~ (50/60 Hz)	21-22	–	White	<b>XB4BVM1EX</b>	0.080/0.176
				Green	<b>XB4BVM3EX</b>	0.080/0.176
				Red	<b>XB4BVM4EX</b>	0.080/0.176
				Orange	<b>XB4BVM5EX</b>	0.080/0.176
				Blue	<b>XB4BVM6EX</b>	0.080/0.176

(1) For additional contacts, please use standard Harmony XB4 range contact blocks ZBE101 (1 NO) and ZBE102 (1 NC)

110022



XB4BVB6EX

# Control and signaling units Ø 22

Harmony XB4 metal, explosive atmosphere

Explosive atmosphere dust + gas offer

Spring return pushbuttons, unmarked

XB4EX\_1038\_CPSC17017



XB4BP482GEX

Pushbuttons with silicon booted head for severe environments								
Screw clamp terminal connections (Schneider Electric anti-loosening system)								
Shape of head	Type of push	Zone		Type of contact		Color of push	Reference	Weight kg/lb
		Dust	Gas	NO	NC			
	Booted, clear silicon For insertion of legends (color of push unobscured)	21-22	1-2	1	–	White	<b>XB4BP181GEX</b>	0.089/0.196
				1	–	Green	<b>XB4BP381GEX</b>	0.089/0.196
				–	1	Red	<b>XB4BP482GEX</b>	0.109/0.240
				1	–	Yellow	<b>XB4BP581GEX</b>	0.109/0.240
				1	–	Blue	<b>XB4BP681GEX</b>	0.109/0.240
	Booted, clear silicon (color of push unobscured)	21-22	1-2	1	–	Black	<b>XB4BP21GEX</b>	0.089/0.196
				1	–	Green	<b>XB4BP31GEX</b>	0.089/0.196
				–	1	Red	<b>XB4BP42GEX</b>	0.109/0.240
				1	–	Yellow	<b>XB4BP51GEX</b>	0.109/0.240
				1	–	Blue	<b>XB4BP61GEX</b>	0.109/0.240
	Booted, colored silicon	21-22	1-2	1	–	White	<b>XB4BPS11GEX</b>	0.080/0.176
				1	–	Black	<b>XB4BPS21GEX</b>	0.080/0.176
				1	–	Green	<b>XB4BPS31GEX</b>	0.080/0.176
				–	1	Red	<b>XB4BPS42GEX</b>	0.081/0.179
				1	–	Yellow	<b>XB4BPS51GEX</b>	0.080/0.176
				1	–	Blue	<b>XB4BPS61GEX</b>	0.080/0.176

XB4EX\_1038\_CPSC17023



XB4BP583BM5GEX

Illuminated pushbuttons with silicon booted head for severe environments									
Screw clamp terminal connections (Schneider Electric anti-loosening system)									
Shape of head	Type of push	Zone D		Type of contact		Supply voltage V	Color of push	Reference	Weight kg/lb
		Dust	Gas	NO	NC				
	Booted, clear silicon For insertion of legends (color of push unobscured)	21-22	1-2	2	–	24...254 ~ 50/60 Hz	White	<b>XB4BP183BM5GEX</b>	0.127/0.280
				2	–		Green	<b>XB4BP383BM5GEX</b>	0.127/0.280
				2	–		Red	<b>XB4BP483BM5GEX</b>	0.127/0.280
				2	–		Yellow	<b>XB4BP583BM5GEX</b>	0.127/0.280
				2	–		Blue	<b>XB4BP683BM5GEX</b>	0.127/0.280


# Control and signaling units Ø 22

Harmony XB4 metal, explosive atmosphere

Explosive atmosphere dust + gas offer




Mushroom head pushbuttons, spring return

Emergency stop and Emergency switching off functions

Mushroom head pushbuttons											
Screw clamp terminal connections (Schneider Electric anti-loosening system)											
Shape of head	Type of reset	Zone D		Type of contact		Push		Reference	Weight kg/lb		
		Dust	Gas	NO	NC	Ø (mm)/in.	Color				
	Mushroom head	21-22	1-2	1	–	40/1.575	Black	XB4BC21GEX	0.126/0.278		
				1	–		Green			XB4BC31GEX	0.126/0.278
				–	1		Red			XB4BC42GEX	0.127/0.280
				1	–		Yellow			XB4BC51GEX	0.126/0.278
				1	–		Blue			XB4BC61GEX	0.126/0.278



XB4BC21GEX

Emergency stop and switching off pushbuttons with trigger action and mechanical latching									
Screw clamp terminal connections (Schneider Electric anti-loosening system)									
Shape of head	Type of reset	Zone D		Type of contact		Push		Reference	Weight kg/lb
		Dust	Gas	NO	NC	Ø (mm)/in.	Color		
	Push-pull	21-22	1-2	1	1	40/1.575	Red	XB4BT845GEX	0.142/0.313
	Turn to release	21-22	1-2	1	1			XB4BS8445GEX	0.141/0.311
	Key release (key no. 455) (3)	21-22	1-2	1	1			XB4BS9445GEX	0.168/0.370



XB4BS9445GEX

# Control and signaling units Ø 22

Harmony XB4 metal, explosive atmosphere

Explosive atmosphere dust + gas offer

Selector switches with standard and long handle

Key switches

XB4EX\_1038\_CFSCT17008



XB4BD33GEX

Selector switches with standard handle										
Screw clamp terminal connections (Schneider Electric anti-loosening system)										
Shape of head	Type of operator	Zone		Type of contact		Positions		Reference	Weight kg/lb	
		Dust	Gas	NO	NC	Number	Type			
	Standard handle, Black	21-22	1-2	1	1	2-position	Stay put 90°	✓	XB4BD25GEX	0.115/0.254
				2	–	3-position ± 45°	Stay put			

XB4EX\_1038\_CFSCT17013



XB4BJ33GEX

Selector switches with long handle										
Screw clamp terminal connections (Schneider Electric anti-loosening system)										
Shape of head	Type of operator	Zone		Type of contact		Positions		Reference	Weight kg/lb	
		Dust	Gas	NO	NC	Number	Type			
	Long handle, Black	21-22	1-2	1	–	2-position	Stay put 90°	✓	XB4BJ21GEX	0.101/0.223
				2	–	3-position ± 45°	Stay put			

XB4EX\_1038\_CFSCT17011



XB4BG33GEX

Key switches														
Screw clamp terminal connections (Schneider Electric anti-loosening system)														
Shape of head	Type of operator	Zone		Type of contact		Positions		Reference	Weight kg/lb					
		Dust	Gas	NO	NC	Number	Type							
	Key switch with key no. 455	21-22	1-2	1	–	2-position	Stay put 90°	✓	XB4BG21GEX	0.159/0.351				
									XB4BG41GEX	0.158/0.348				
											Spring return to left	↔	XB4BG61GEX	0.160/0.353
								2	–	3-position ± 45°	Stay put	↔	XB4BG03GEX	0.176/0.388
							XB4BG33GEX						0.177/0.390	

# Control and signaling units Ø 22

Harmony XB4 metal, explosive atmosphere


Explosive atmosphere dust + gas offer

Pilot lights with integral LED, Push-to-test pilot light

Contact and Light blocks

## Pilot lights with integral LED (with plain lens)

Screw clamp terminal connections (Schneider Electric anti-loosening system)


Shape of head	Supply voltage V	Zone		Color	Reference	Weight kg/lb
		Dust	Gas			
 Protected LED	24...240 ~ (50/60 Hz)	21-22	1-2	White	<b>XB4BVB1GEX</b>	0.083/0.183
				Green	<b>XB4BVB3GEX</b>	0.083/0.183
				Red	<b>XB4BVB4GEX</b>	0.083/0.183
				Orange	<b>XB4BVB5GEX</b>	0.083/0.183
				Blue	<b>XB4BVB6GEX</b>	0.083/0.183

XB4EX\_1038\_CPSC17038



XB4BVB6GEX

## Push-to-test pilot light (with plain lens)

Shape of head	Supply voltage V	Zone		Color	Reference	Weight kg/lb
		Dust	Gas			
 Protected LED	24...254 ~ (50/60 Hz)	21-22	1-2	White	<b>XB4BW21BM5GEX</b>	0.117/0.258
				Green	<b>XB4BW23BM5GEX</b>	0.117/0.258
				Red	<b>XB4BW24BM5GEX</b>	0.117/0.258
				Orange	<b>XB4BW25BM5GEX</b>	0.117/0.258
				Blue	<b>XB4BW26BM5GEX</b>	0.117/0.258



XB4EX\_1038\_CPSC17088



XB4BW25BM5GEX

## Contact blocks (1)

Screw clamp terminal connections (Schneider Electric anti-loosening system)

Description	Type of contact	Zone		Type of contact		Sold in lots of	Reference	Weight kg/lb
		Dust	Gas					
Contact blocks Single	Single	21-22	1-2	1	–	1	<b>ZBE101GEX</b>	0.018/0.040
				–	1	1	<b>ZBE102GEX</b>	0.019/0.042

XB4EX\_1038\_CPSC17039



ZBE101GEX

## Light blocks (1)

Screw clamp terminal connections (Schneider Electric anti-loosening system)

Light source	Supply voltage V	Zone		Color of light source	Sold in lots of	Reference	Weight kg/lb
		Dust	Gas				
Integral LED	24...254 ~ (50/60 Hz)	21-22	1-2	White	1	<b>ZBVB1GEX</b>	0.020/0.044
				Green	1	<b>ZBVB3GEX</b>	0.020/0.044

XB4EX\_1038\_CPSC17041



ZBVB3GEX

(1) To be used only with explosive atmosphere dust + gas offer products

X		Z	
XB4BC21EX	5	XB4BP483M5EX	4
XB4BC21GEX	9	XB4BP581EX	4
XB4BC31EX	5	XB4BP581GEX	8
XB4BC31GEX	9	XB4BP583B5EX	4
XB4BC42EX	5	XB4BP583BG5EX	4
XB4BC42GEX	9	XB4BP583BM5GEX	8
XB4BC51EX	5	XB4BP583G5EX	4
XB4BC51GEX	9	XB4BP583M5EX	4
XB4BC61EX	5	XB4BP681EX	4
XB4BC61GEX	9	XB4BP681GEX	8
XB4BD25EX	6	XB4BP683B5EX	4
XB4BD25GEX	10	XB4BP683BG5EX	4
XB4BD33EX	6	XB4BP683BM5GEX	8
XB4BD33GEX	10	XB4BP683G5EX	4
XB4BD53EX	6	XB4BP683M5EX	4
XB4BD53GEX	10	XB4BPS11EX	4
XB4BG03EX	6	XB4BPS11GEX	8
XB4BG03GEX	10	XB4BPS21EX	4
XB4BG21EX	6	XB4BPS21GEX	8
XB4BG21GEX	10	XB4BPS31EX	4
XB4BG33EX	6	XB4BPS31GEX	8
XB4BG33GEX	10	XB4BPS42EX	4
XB4BG41EX	6	XB4BPS42GEX	8
XB4BG41GEX	10	XB4BPS51EX	4
XB4BG61EX	6	XB4BPS51GEX	8
XB4BG61GEX	10	XB4BPS61EX	4
XB4BJ21EX	6	XB4BPS61GEX	8
XB4BJ21GEX	10	XB4BS8445EX	5
XB4BJ33EX	6	XB4BS8445GEX	9
XB4BJ33GEX	10	XB4BS9445EX	5
XB4BJ53EX	6	XB4BS9445GEX	9
XB4BJ53GEX	10	XB4BT845EX	5
XB4BP21EX	4	XB4BT845GEX	9
XB4BP21GEX	8	XB4BVB1EX	7
XB4BP31EX	4	XB4BVB3EX	7
XB4BP31GEX	8	XB4BVB4EX	7
XB4BP42EX	4	XB4BVB5EX	7
XB4BP42GEX	8	XB4BVB6EX	7
XB4BP51EX	4	XB4BVBG1EX	7
XB4BP51GEX	8	XB4BVBG3EX	7
XB4BP61EX	4	XB4BVBG4EX	7
XB4BP61GEX	8	XB4BVBG5EX	7
XB4BP181EX	4	XB4BVBG6EX	7
XB4BP181GEX	8	XB4BVBM1GEX	11
XB4BP183B5EX	4	XB4BVBM3GEX	11
XB4BP183BG5EX	4	XB4BVBM4GEX	11
XB4BP183BM5GEX	8	XB4BVBM5GEX	11
XB4BP183G5EX	4	XB4BVBM6GEX	11
XB4BP183M5EX	4	XB4BVG1EX	7
XB4BP381EX	4	XB4BVG3EX	7
XB4BP381GEX	8	XB4BVG4EX	7
XB4BP383B5EX	4	XB4BVG5EX	7
XB4BP383BG5EX	4	XB4BVG6EX	7
XB4BP383BM5GEX	8	XB4BVM1EX	7
XB4BP383G5EX	4	XB4BVM3EX	7
XB4BP383M5EX	4	XB4BVM4EX	7
XB4BP482EX	4	XB4BVM5EX	7
XB4BP482GEX	8	XB4BVM6EX	7
XB4BP483B5EX	4	XB4BW21BM5GEX	11
XB4BP483BG5EX	4	XB4BW23BM5GEX	11
XB4BP483BM5GEX	8	XB4BW24BM5GEX	11
XB4BP483G5EX	4	XB4BW25BM5GEX	11
		XB4BW26BM5GEX	11



[www.schneider-electric.com/control](http://www.schneider-electric.com/control)

#### Schneider Electric Industries SAS

Head Office  
35, rue Joseph Monier  
F-92500 Rueil-Malmaison  
France

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Design: Schneider Electric  
Photos: Schneider Electric